


**TAPE CASSETTE**

**Patent number:** JP4325981  
**Publication date:** 1992-11-16  
**Inventor:** MEGURO HIROSHI; others: 01  
**Applicant:** SONY CORP  
**Classification:**  
- **international:** G11B23/087  
- **europaean:**  
**Application number:** JP19910121901 19910425  
**Priority number(s):**

**Abstract of JP4325981**

**PURPOSE:**To improve efficiency and accuracy in tightening screws for fixing by making possible a temporary fixation between an upper shell and a lower shell before tightening the screws.

**CONSTITUTION:**In the tape cassette of which both shells are fixed by screwing the screw, which is inserted through a screw inserting part into a boss part for screw tightening under such a state as the screw tightening boss part of one shell is fit in the receiving boss part of the other shell, a rib L, which is in pressurized contact when the screw tightening boss part 2c3 is fit in the receiving boss part 3e3 in one of the shells, is provided.

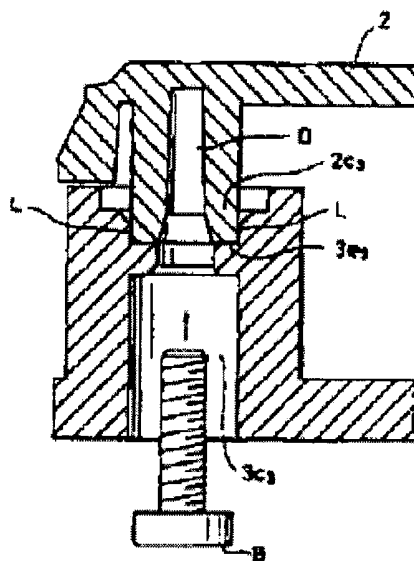

Data supplied from the **esp@cenet** database - Worldwide

## Reference 2

Japanese patent publication No. 43-25981 (published November 8, 1968)

Application No. 39-9226 (filed February 24, 1964)

Applicant: Japan synthetic rubber Co., Ltd.

Title: Process for preparing conjugated diolefin type copolymer

### Claims (single claim):

1. Process for preparing conjugated diolefin type copolymer dissolvable in alkali aqueous solution, characterized in that a mixture of unsaturated acid and conjugated diolefin or a mixture of unsaturated acid, conjugated diolefin and mono olefinic unsaturated compound is copolymerized in alcohol or a solvent consisting mainly of alcohol.

### Object:

To prepare a water-soluble composition used as coating material to form a continuous film on substrates such as fiber, paper, web, wood, rubber, plastic, metal or glass.

### Examples:

#### Example 1

100 parts by weight of monomers comprising 38.6 mol% of methacrylic 61.4 mol% of 1,3-butadiene, 300 parts of methanol, 0.1 parts of benzoylperoxide were reacted at 70°C, for 15 hours to obtain a copolymer soluble in alkali solution and in organic solvents. A transparent film can be obtained from the copolymer.